

# D15-BO-V1AV

## 1. Description:


D15-BO-V1AV is a simple DB15 vertical connector breakout board. It brings all 15 pins of a DB15 connector to screw terminal blocks or headers for easy testing, prototyping and breadboard connection. For breadboard connections, user can use the two 8pin headers on both sides of the breakout board to connect to the breadboard for a steady connection.

## 2. Features:


- All 16 pins (including shield) of a DB15HD connector brought out to headers
- Various connecting method chosen by users.
- 0.9"(22.86mm)X2.21"(56.2mm) board dimensions
- 2 X 3.0mm mounting holes

## 3. Parts:

- 1pc X D15-BO-V1AV PCB
- 1pc X D15 Female Vertical Connector (for D15-F-BO-V1AV only)
- 1pc X D15 Male Vertical Connector (for D15-M-BO-V1AV only)
- 2pc X 8pin 0.1"(2.54mm) spacing terminal block
- 1pc X 16pin 0.1"(2.54mm) header

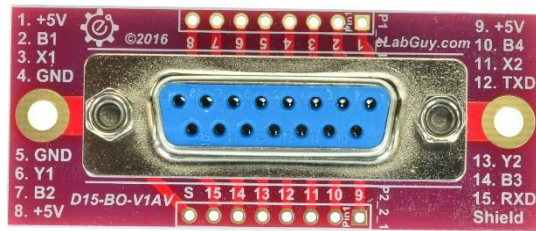

**D15-F-BO-V1AV**

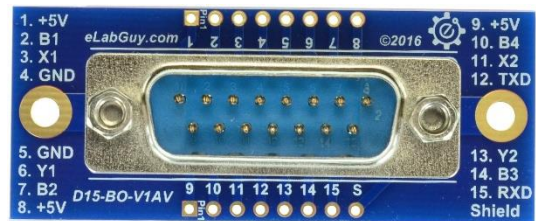

**D15-M-BO-V1AV**

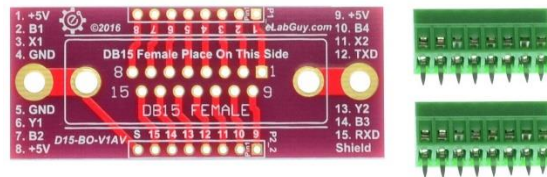


Figure 1: Parts inside the kit  
(Note: the module is not assembled, user can decide which connection to use on the module.)



Figure 2: Various connectors chosen by user

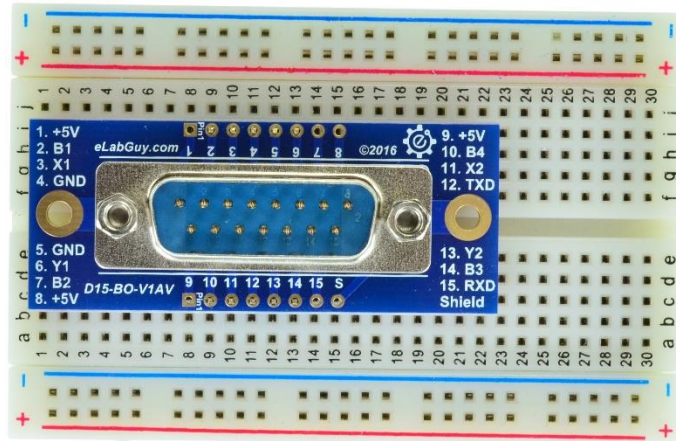


Figure 3: Attaching the D15-BO-V1AV on a breadboard

**Caution!! When assembling the D15-BO-V1AV, please make sure you place the connector on the right side.**



### Related products from eLabGuy:



D15-F-BO-V2A



D15-M-BO-V2A



D15-F-BO-V1AS



D15-M-BO-V1AS