

# RJ11-BO-V1AV

## 1. Description:

RJ11-BO-V1AV is a simple RJ11 6P6C vertical socket breakout board. (Also compatible with RJ14 and RJ25) It brings all 6 pins of a RJ11 socket to screw terminal blocks or headers for easy testing, prototyping and breadboard connection. For breadboard connections, user can use the two 6pin headers on both sides of the breakout board to connect to the front end of the breadboard for a steady connection.

## 2. Features:

- All 6 pins of a RJ11 6P6C vertical socket brought out to headers or screw terminal blocks
- Various connecting method chosen by users.
- 2 mounting holes with 3mm diameter hole size
- 1.0"(25.4mm)X1.33"(33.70mm) board dimensions

## 3. Parts:

- 1) 1pc X RJ11-BO-V1AV PCB
- 2) 1pc X RJ11 vertical socket
- 3) 1pc X 6pin 0.1"(2.54mm) spacing terminal block
- 4) 1pc X 12pin 0.1"(2.54mm) header

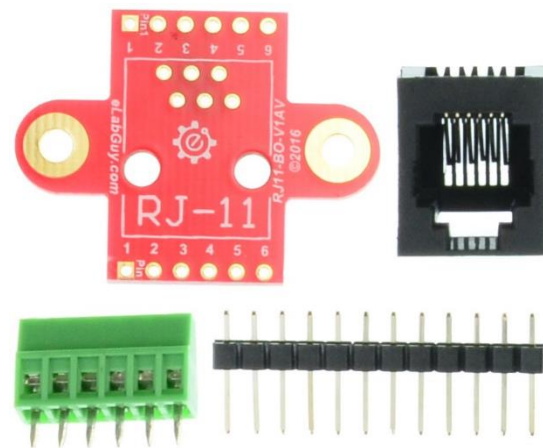
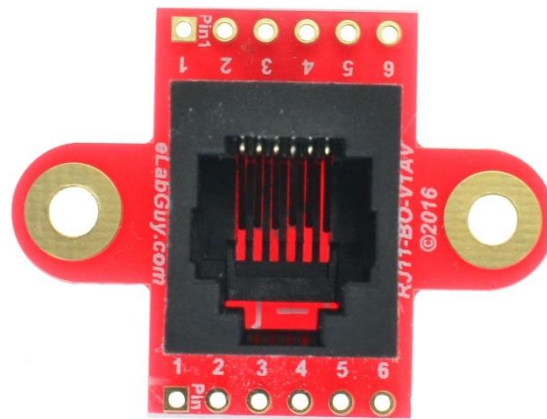


Figure 1: Parts inside the kit  
(Note: the module is not assembled, user can decide which connector to use on the module.)

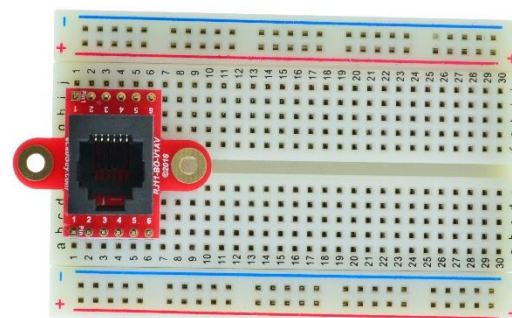


Figure 2: Example of connecting the RJ11-BO-V1AV on a breadboard

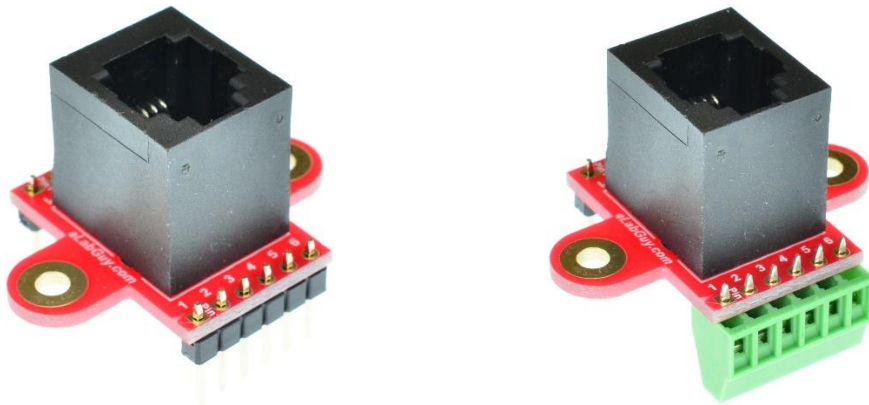


Figure 3: RJ11-BO-V1AV Various connections


### Related products from eLabGuy:



**RJ10-BO-V1A**



**RJ11-BO-V2A**



**RJ45-BO-V2A**